


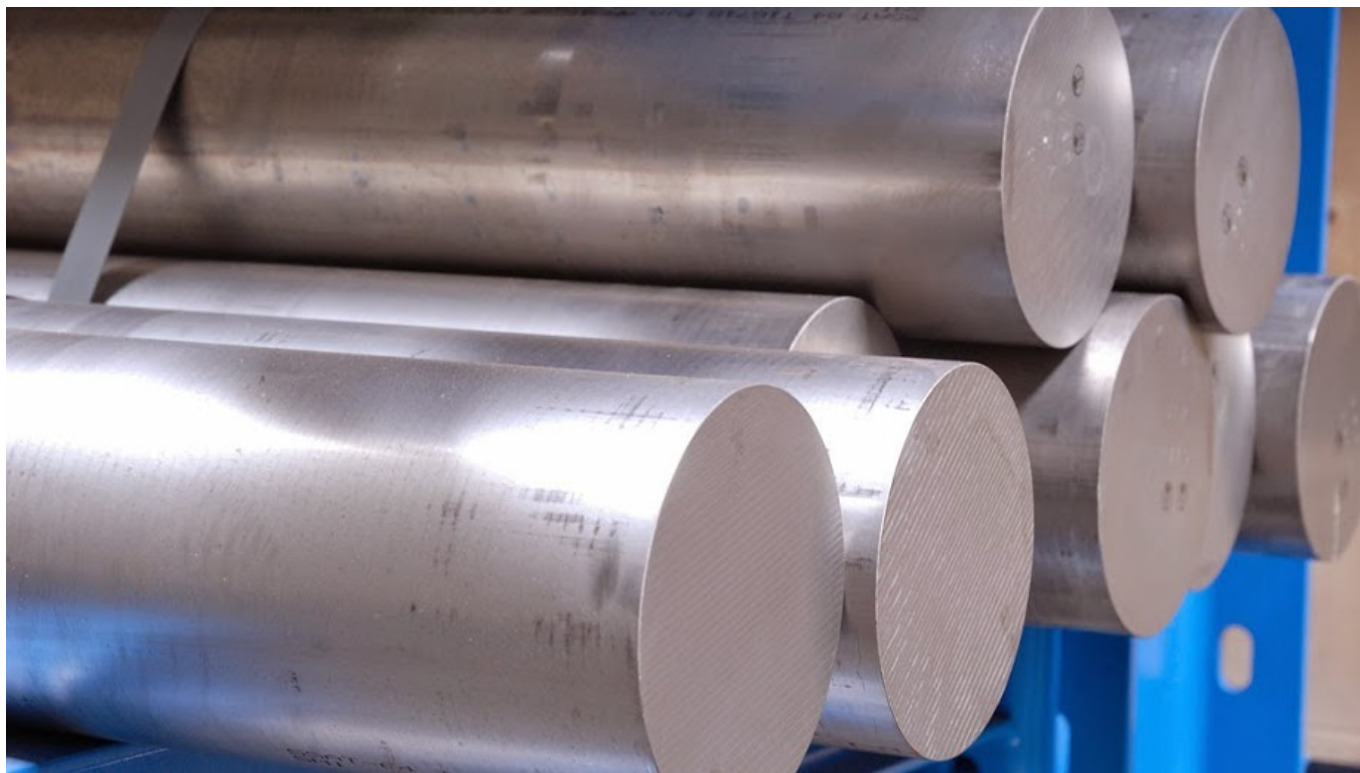

Medidas disponibles

Barra redonda titanio 6A14V

ASTM B348 | WL 3.7164

8,0 mm Ø
10,0 mm Ø
12,0 mm Ø
16,0 mm Ø
20,0 mm Ø
22,0 mm Ø
25,0 mm Ø
30,0 mm Ø
32,0 mm Ø
35,0 mm Ø
38,1 mm Ø
40,0 mm Ø
45,0 mm Ø
50,0 mm Ø

50,8 mm Ø
55,0 mm Ø
60,0 mm Ø
65,0 mm Ø
70,0 mm Ø
75,0 mm Ø
80,0 mm Ø
90,0 mm Ø
100,0 mm Ø
110,0 mm Ø
115,0 mm Ø
120,0 mm Ø
130,0 mm Ø
140,0 mm Ø
150,0 mm Ø
160,0 mm Ø
165,0 mm Ø
170,0 mm Ø
180,0 mm Ø
190,0 mm Ø
200,0 mm Ø
220,0 mm Ø
230,0 mm Ø
250,0 mm Ø
280,0 mm Ø

Chapas/planchas titanio 6A14V

ASTM B265 | WL 3.7164

0,5 mm
1,0 mm
1,2 mm
1,6 mm
2,0 mm
2,5 mm
3,0 mm
4,0 mm
5,0 mm

6,0 mm
6,35 mm
8,0 mm
10,0 mm
12,0 mm
16,0 mm
20,0 mm
25,0 mm
30,0 mm
32,0 mm
35,0 mm
40,0 mm
45,0 mm
50,0 mm
55,0 mm
60,0 mm
63,5 mm
65,0 mm
70,0 mm
76,2 mm
80,0 mm
85,0 mm
90,0 mm
100,0 mm
110,0 mm

Barras redondas

Grado 2 ASTM B348 + F67

4 mm Ø
5 mm Ø
6 mm Ø
8 mm Ø
10 mm Ø
12 mm Ø
15 mm Ø
16 mm Ø
20 mm Ø

25 mm Ø
30 mm Ø
35 mm Ø
40 mm Ø
45 mm Ø
50 mm Ø
55 mm Ø
60 mm Ø
65 mm Ø
70 mm Ø
75 mm Ø
80 mm Ø
90 mm Ø
95 mm Ø
100 mm Ø
110 mm Ø
120 mm Ø
130 mm Ø
140 mm Ø
150 mm Ø
170 mm Ø
180 mm Ø
190 mm Ø
200 mm Ø
250 mm Ø

Barras redondas

Grado 2 ASTM B348 + F67

4 mm
5 mm
6 mm
8 mm
10 mm
12 mm
15 mm
16 mm
20 mm

25 mm
30 mm
35 mm
40 mm
45 mm
50 mm
55 mm
60 mm
65 mm
70 mm
75 mm
80 mm
90 mm
95 mm
100 mm
110 mm
120 mm
130 mm
140 mm
150 mm
170 mm
180 mm
190 mm
200 mm
250 mm